


KOCOM's hybrid home network offers a convenient and safe housing life anywhere by connecting various digital devices with networks.



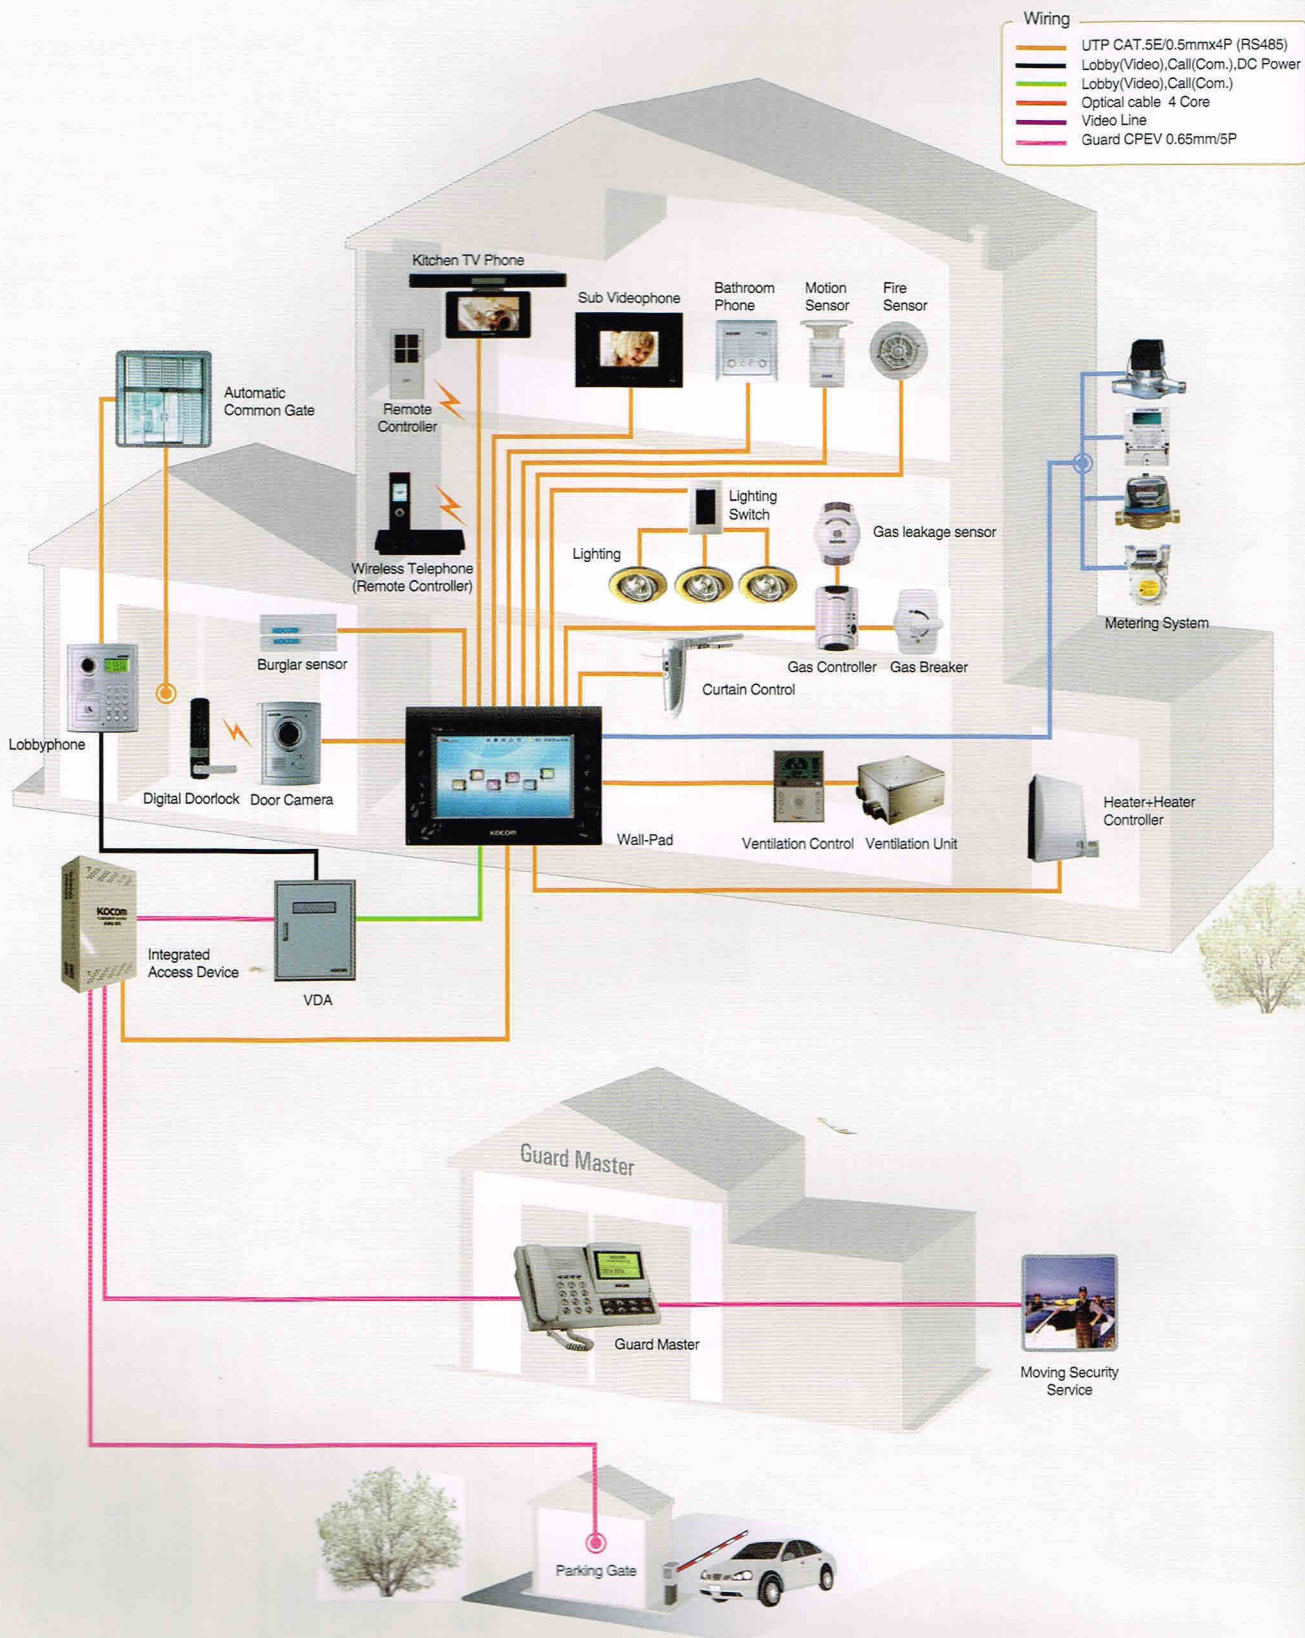

KHN-971/973 C O L O R

Wall-pad

- 7" Color Digital Touch LCD
- Remote Control of Entrance
- Security and Accident Detection System
- Visitor identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Video Conference between households and Guard (ALL IP product : KHN-973)
- Mutual Calling & Communication Between Residents
- Auto Record in Absence Mode
- Telephone Function
- Dimension (mm) : 292.5(W)×196(H)×17(D)
- Back Dimension (mm) : 225(W)×155(H)×53(D)
- Flush Box (mm) : 320(W)×240(H)×105(D)
- Camera connection : KC-C71



KHN-881/883 C O L O R

Wall-pad

- 10.2" Color Digital Touch LCD
- Remote Control of Entrance
- Security and Accident Detection System
- Visitor identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Video Conference between households and Guard (ALL IP product : KHN-883)
- Mutual Calling & Communication Between Residents
- Auto Record in Absence Mode
- Telephone Function
- Dimension : 337.5(W)×235.5(H)×18.5(D)
- Back Dimension (mm) : 225(W)×175(H)×53(D)
- Flush Box (mm) : 320(W)×240(H)×105(D)
- Camera connection : KC-C71



White Type

Black Type



KHN-871/873 C O L O R

Wall-pad

- 7" Color Digital Touch LCD
- Remote Control of Entrance
- Security and Accident Detection System
- Visitor identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Video Conference between households and Guard (ALL IP product : KHN-873)
- Mutual Calling & Communication Between Residents
- Auto Record in Absence Mode
- Telephone Function
- Dimension (mm) : 298(W)×208(H)×18.5(D)
- Back Dimension (mm) : 225(W)×155(H)×53(D)
- Flush Box (mm) : 320(W)×240(H)×105(D)
- Camera connection : KC-C71



Black Type

White Type



KHN-773 C O L O R

Wall-pad

- 7" Color Digital Touch LCD
- Remote Control of Entrance
- Security and Accident Detection System
- Visitor identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Video Conference between households and Guard (ALL IP)
- Mutual Calling & Communication Between Residents
- Auto Record in Absence Mode
- Telephone Function
- Dimension : 289(W)×184(H)×18.5(D)
- Back Dimension (mm) : 220(W)×145(H)×53(D)
- Flush Box (mm) : 320(W)×240(H)×105(D)
- Camera connection : KC-C71

Gateway & Guard Master



KHG-108/112/116

Gateway

KLP-300R2

All IP Type Lobby Phone

KAM-300

Guard Master

- Home Control function :
Lights, Heater, Gas, Curtain and Electrical Appliance
- SMS transmission for mobile phone control
- Network function : Switching Hub (10/100Mbps) up to 16 ports
- IPTV / Wired AP / IP Camera connection
- Management : Remote upgrade & Control, home device setting, managing & working status LED
- Dimension (mm) : 226(W) x 170(H) x 17(D)

- TCP / IP Lobby phone
- 2.3" Graphic LCD
- Call / Communication with resident & Guard
- Door open function by Access code or RF Card (Option)
- Dimension(mm) : 235(W)×295(H)×21(D)
- Box (mm) : 240(W)×320(H)×100(D)

- 7" LCD Digital Touch Display
- Video conference between household and Lobbyphone
- Gate open in communication with visitor
- Absence Function (Setting)
- Telephone (PSTN) Function
- Dimension(mm) : 338(W)×220(H)×100(D)

Home Automation System

Home Automation




KHV-478 / 458 / KCV-378 C O L O R

- 7" Color LCD (KHV-478 / KCV-378) 5" Color LCD (KHV-458)
- Door Open & Monitoring Function
- Call & Communication with Guard Master(KAM-305)
- Telephon Function
- Common Gate Camera Open & Monitoring Function
- DSP Handsfree Type
- Mutual Calling & Communication Between Residents
- Security : Gas leakage sensor(KHV-478, KCV-458), Security 1(Burglar sensor), Security 2 (Motion Sensor), Emergency Button(KHV-478, KCV-458)
- Dimension (mm) : 330(W)×232(H)×17(D)
- Back Dimension(mm) : 225(W)×180(H)×53(D)
- Box (mm) : 320(W)×240(H)×105(D)
- Camera connection : KC-C71



KHN-970 C O L O R

- 7" Color Digital Touch LCD
- Remote Control of Entrance
- Security and Accident Detection System
- Visitor identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Mutual Calling & Communication Between Residents
- Auto Record in Absence Mode
- Telephone Function
- Dimension (mm) : 292.5(W)×196(H)×17(D)
- Back Dimension (mm) : 225(W)×155(H)×53(D)
- Flush Box (mm) : 320(W)×240(H)×105(D)
- Camera connection : KC-C71

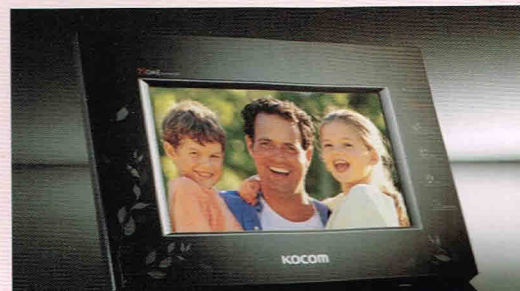

KHN-880 C O L O R

- 10.2" Color Digital Touch LCD
- Remote Control of Entrance
- Security and Accident Detection System
- Visitor identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Mutual Calling & Communication Between Residents
- Auto Record in Absence Mode
- Telephone Function
- Dimension : 337.5(W)×235.5(H)×18.5(D)
- Back Dimension (mm) : 225(W)×175(H)×53(D)
- Flush Box (mm) : 320(W)×240(H)×105(D)
- Camera connection : KC-C71



White Type




White Type



Black Type


KHN-870 COLOR

- 7" Color Digital Touch LCD
- Remote Control of Entrance
- Security and Accident Detection System
- Visitor identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Mutual Calling & Communication Between Residents
- Auto Record in Absence Mode
- Telephone Function
- Dimension (mm) : 298(W)×208(H)×18.5(D)
- Back Dimension (mm) : 225(W)×155(H)×53(D)
- Flush Box (mm) : 320(W)×240(H)×105(D)
- Camera connection : KC-C71

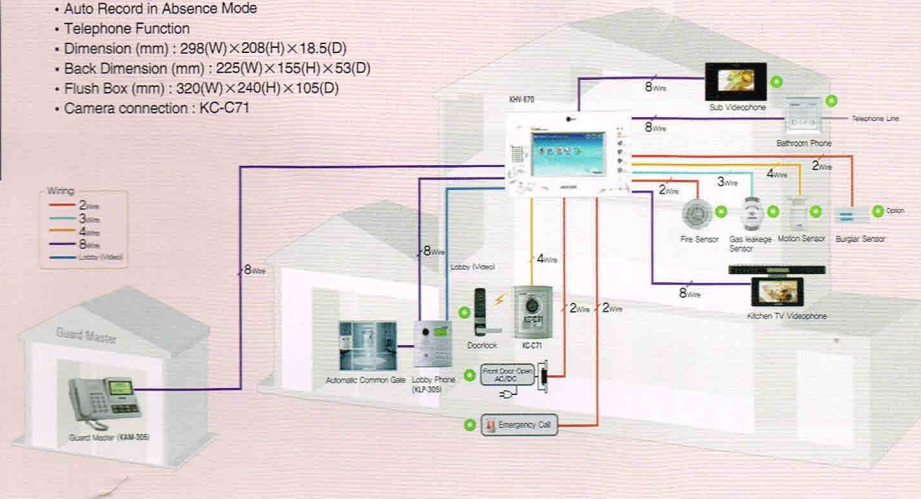


KCV-C374 COLOR

- 7" Color Digital LCD
- LCD OSD Menu Display
- Remote Control of Entrance
- Visitor Identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Simple & Compact Home Automation Wall-pad
- Ultra Low Power Consumption.
- Dimension (mm) : 222(W) x 142(H) x 26.5(D)
- Camera connection : KC-C60, KC-C71

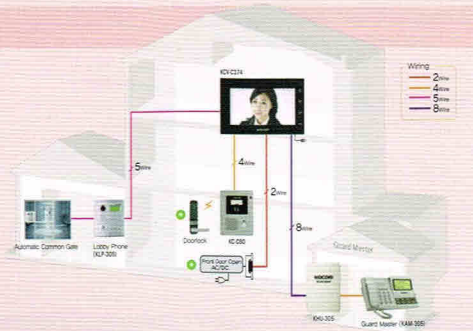


KCV-J351 COLOR

- 3.5" Color Digital LCD (OSD Menu)
- LCD OSD Menu Display
- Remote Control of Entrance
- Visitor identification & Communication through front door & Common gate camera(Lobby phone) and door open
- Mutual Calling & Communication Between Residents
- Auto Record in Absence Mode
- Simple & Compact Home Automation Wall-pad
- Ultra Low Power Consumption
- Dimension (mm) : 177(W) x 254(H) x 20(D)
- Back Dimension (mm) : 120(W) x 196(H) x 30(D)
- Flush Box (mm) : 200(W) x 270(H) x 90(D)
- Camera connection : KC-C60, KC-C71

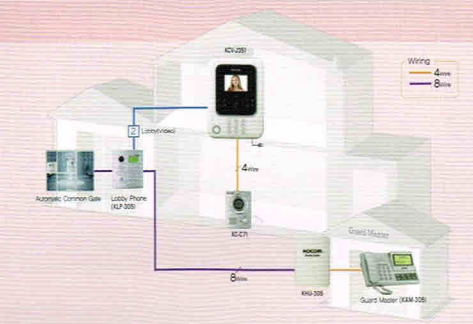

KIP-300BA (Interphone)

- Guard master Calling
- Communication Between Residents
- Remote Control of Entrance
- Volume Control (Level 3.)
- Intercom Function
- Call & Door open(Optional)
- Dimension (mm) : 140(W) x 175(H) x 39(D)
- Outdoor Panel : DS-2D

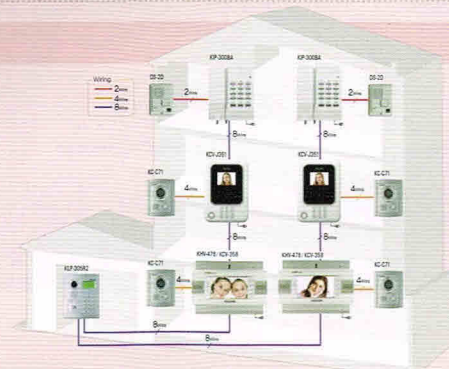


Lobbyphone & Guard Master



KAM-305

Admin/ Guard Master

- Communication between caller
- Common gate (Lobby phone) Communication & Door open
- Guard Mode (Absent mode) / Call Forwarding mode
- Guard master to house call & commutation
- Call Status display
- Emergency status & display
- Dimension(mm) : 338(W)×220(H)×100(D)

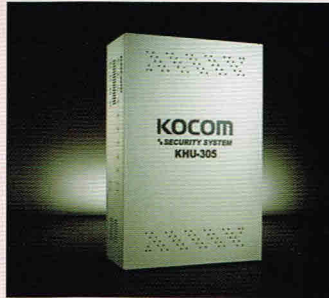

KLP-305

KIP-305

KHU-305

KSR-008

- Lobby phone
- 2.3" Graphic LCD
- Call / Communication with resident & Guard
- Door open function by Access code or RF Card (Option)
- Dimension(mm) : 235(W)×295(H)×21(D)
- Box (mm) : 240(W)×320(H)×100(D)

- Communication between Mutual Interphone
- Operation : Telephone type (10key button)
- Dimension (mm) : 165(W)×220(H)×80(D)

- Access & Communication Main Device between Each apartment, Guard Master and Integrated Access Device
- Upto 960 apartments and 80 Lobby Phones (Entry Access Panel) Connection
- Dimension (mm) : 300(W)×421(H)×147(D)

- Communication with Home Automation and Home Network Wall-pad for security sensor
- Power : DC 12V
- Dimension(mm) : 163(W)×150(H)×39(D)

Videophone

Security Videophone



KVR-A510 COLOR

DVR Videophone

Videophone

- 10" Color Digital Touch LCD
- Call & Video Communication with a visitor
- Internal call & Communication
- Monitoring outside through a door camera or a CCTV camera
- Real-time Video Recording or by setting instructions
- Door open Function
- 5 Melody selection
- Extend communication time(3 min.) by touching a button

DVR

- INPUT : 4CH Camera, 4CH Audio, 1CH Sensor
- OUTPUT : 1CH video out(composite), 1CH Alarm
- Live view : Digital Zoom(x2), Monitoring Mode(1,4&PIP)
- Recording : Resolution : NTSC-720x480, PAL-720x576 Recording Mode
- Network : Dual Stream : Local Recording & Network Transmission
- Home Control : lighting, curtain, and gas
- Digital Album, Calendar & Clock
- Screen Saver

• Dimension (mm) : 355(W)X185(H)X40(D) / Cradle : 205(W)X145(H) 105(D)


• Camera connection : KC-MC24, KC-MC31, KC-MC30, KC-MC20, KC-C60

• Monitor connection : KCV-A374/D374, KCV-A374SD/D374SD, KCV-W354/DW354, KCV-801/801R, KCV-D801/D801R



KCV-802R / KCV-D802R COLOR

- 7" Color LCD (NTSC / PAL Auto Switching)
- Single House, Multi Apartment Condominium & Villa System(upto 450 units)
- Upto 4 Indoor Units Including Audio Sub Phones with 2 Door Cameras & Common Gate Cameras Connection
- Internal Call & Communication between Extended Indoor Units
- Door Open & Monitoring Function (Door Camera & Common Gate Camera)
- Telephone Function(PABX)
- Call & Conversation with Guard Master Phone (KIP-120)
- 18 Melody Selection (24 Poly Melody)
- Extra Special Function key Button
- Built-in 128 Cut Images Memory & OSD (On Screen Display) Menu Control
- KCV-802 : AC Type, KCV-802R : DC type
- Dimension (mm) : 295(W)X170(H)X48(D)
- Camera connection : KC-C60, KC-MC30

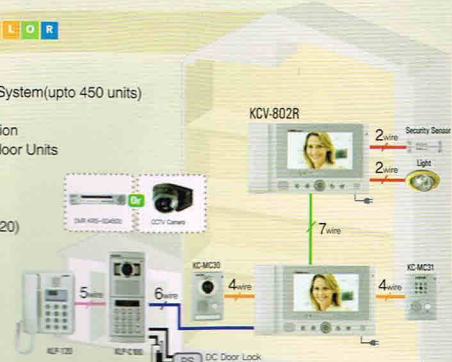

Single & Bus Type Multi Videophone




KCV-A376 / KCV-D376 C O L O R

- 7" TFT DIGITAL LCD Color Handsfree Videophone
- Slim Compact & Luxury Design
- Easy to operate using OSD manu & Touch Key
- Single House & Multi Apartment, Condominium & Villa System (upto 450 houses) are available.
- Up to 5 indoor units (4 monitor & 1 Audio Handset : KIP-603) and 2 Front door Cameras connection.
- Internal Call & Communication Function between Extended Indoor Units in a House
- Audio + Video Communication with Visitor
- Door Open (Front Door & Common Gate) Function
- Call & Communication Function with Guard Master (KIP-120)
- Monitoring Function from Front Door Camera & Common Gate Camera (KLP-C100)
- KCV-A376 : AC type, KCV-D376 : DC type
- Dimension (mm) : 222(W)x142(H)x33(D)
- Camera connection : KC-C60, KC-MC35, KC-MC20



KIV-212/D212 C O L O R

- 5" TFT LCD Color Handsfree Videophone
- Single House & Multi Apartment, Condominium & Villa System (upto 450 Houses) are Available
- Up to 5 Indoor Units (4 Monitor & 1 Audio Handset, KIP-603) and 2 Front Door Cameras Connection
- Internal Call & Communication Function between Extended Indoor Units in a House
- Audio + Video Communication with Visitor
- Door Open (Front Door & Common Gate) Function
- Call & Communication Function with Guard Master (KIP-120)
- Monitoring Function from Front Door Camera & Common Gate Camera (KLP-C100)
- KIV-212 : AC Type, KIV-D212 : DC type
- Dimension (mm) : 237(W) x 199(H) x 39(D)
- Camera connection : KC-C60, KC-MC35, KC-MC20

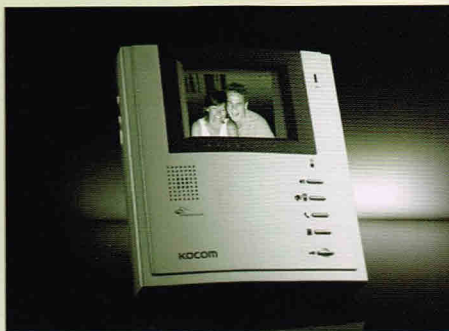

KIV-102/D102 B / W

- 4" CRT B/W Handsfree Videophone
- Single House & multi Apartment, Condominium & Villa System (upto 450 Houses) are Available
- Up to 5 Indoor units (4 Monitor & 1 Audio Handset, KIP-603) and 2 front Door Cameras Connection
- Internal Call & Communication Function between Extended Indoor Units in a House
- Audio + Video Communication with Visitor
- Door Open (Front Door & Common gate) Function
- Call & Communication Function with Guard Master (KIP-120)
- Monitoring Function from Front Door Camera & Common Gate Camera (KLP-100)
- KIV-102 : AC Type, KIV-D102 : DC type
- Dimension (mm) : 191(W) x 217(H) x 52(D)
- Camera connection : KC-C63, KC-D33, KC-MB20



KVM-520/D520 B / W

- 4" CRT B/W Videophone
- Single House & Multi Apartment, Condominium & Villa System (upto 450 houses) are Available
- Up to 5 Indoor Units (4 Monitor & 1 Audio Handset, KIP-603) and 1 Front Door Camera Connection
- Internal Call & Communication Function between Extended Indoor Units in a House
- Audio + Video Communication with Visitor
- Door Open (Common gate) Function
- Call & Communication Function with Guard Master (KIP-120)
- Up to 4pcs of Common Gate Cameras Connection in a Building
- KVM-520 : AC Type / KVM-D520 : DC Type
- Dimension (mm) : 210(W) x 222(H) x 57(D)
- Camera connection : KC-B61, KC-D20

Bus Type Multi-Entry System



Normal Lens Type

- KLP-C100(Color) / 100(B/W)
- KLP-C104(Color) / 104(B/W)
- KLP-C108(Color) / 108(B/W)
- KLP-C112(Color) / 112(B/W)



Pinhole Lens Type

- KLP-P100(B/W)
- KLP-P104(B/W)
- KLP-P108(B/W)
- KLP-P112(B/W)

KLP-C100 KLP-C104/C108/C112 C O L O R Lobbyphone

KLP-100 KLP-104/108/112 B / W Lobbyphone

- Upto 4 House (-104 type) / Upto 8 Houses (-108 type) Upto 12 Houses (-112 type)
- Upto 450 Houses Connection (10 Key Button Type)
- Communication with Guard Master (10 key Button Type)
- Door Open Function by Access Code (10 key button type) or by RF cards (option)
- Angle Adjustment (Up & Down, Right & Left)
- Firm Metal Body Case with New Modern Design
- Upto 9pcs of Common Gate Cameras Connection in a Building
- Normal & Pinhole Lens Camera (KLP-P Series) Selection
- Dimension (mm) : 122(W) x 255(H) x 33.5(D)
- Box (mm) : 101(W) x 223(H) x 105(D)

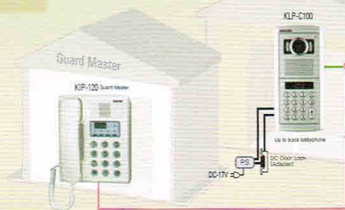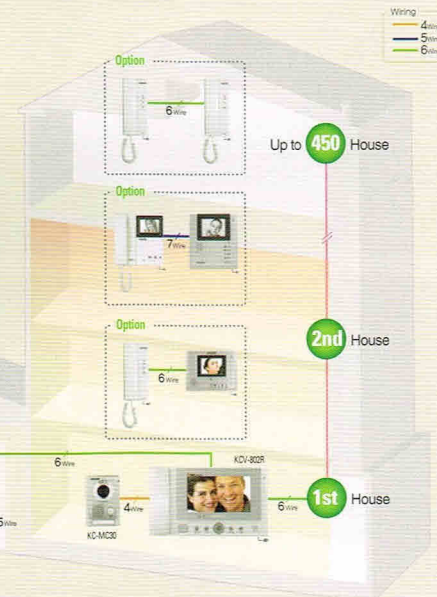


SD Card Videophone



KCV-A374SD/D374SD COLOR

- 7" Color Digital LCD (NTSC / PAL Auto switching)
- Slim, Compact & Luxury Design
- Easy to operate using OSD menu & Touch key
- Digital Photo Album
- Digital Video Recorder - Motion Detection
- Memory Size : up to 32Gb(SD Card interface)
- Video Format : Moving picture (H.264), Still cut : JPEG
- Multiple language support- English, Spanish, French and Russian
- Connection up to 2 Door cameras or CCTV cameras with 2 monitors and 2 sub audio phone(KDP-602G)
- Call & Communication with visitor & Door open function
- KCV-A374SD : AC Type, KCV-D374SD : DC Type
- Door Opener Connectable from Either Monitor or Camera
- Dimension (mm) : 222(W) x 142(H) x 33(D)
- Camera connection : KC-C60, KC-MC30, KC-MC24, KC-MC20

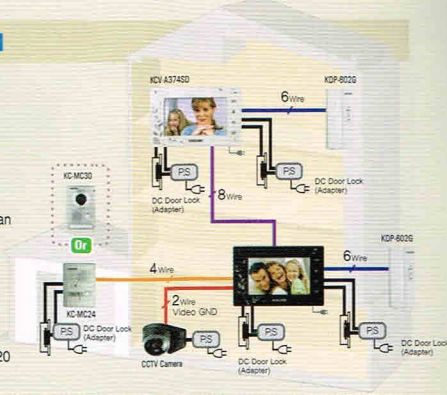


Videophone




KCV-A372/KCV-D372 COLOR

- Clear image and high resolution 7" Color Digital LCD
- Easy & Simple installation- 2 Wire non-polarity
- OSD Menu function
- Automatic connection check between monitor and camera
- Call & Communication with visitor & Door open function
- KCV-A372 : AC Type, KCV-D372 : DC type
- Dimension (mm) : AType - 222(W) x 142(H) x 33(D)
DType - 222(W) x 142(H) x 26.5(D)
- Camera connection : KC-C62, KC-MC32, KC-MC22, KC-MC11

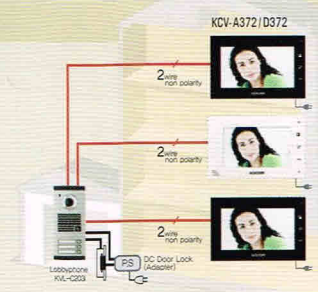


KCV-352/KCV-D352 COLOR

- 3.5" Color Digital LCD (NTSC / PAL)
- Easy & Simple installation 2 Wire non-polarity
- LCD OSD Menu
- Room to Door Communication and Monitoring
- Ultra Low Power Consumption
- Door Opener Connectable from Either Monitor or Camera
- KCV-352 : AC Type, KCV-D352 : DC Type
- Dimension (mm) : 195(W) x 140(H) x 34.5(D)
- Camera connection : KC-C62, KC-MC32, KC-MC22, KC-MC11

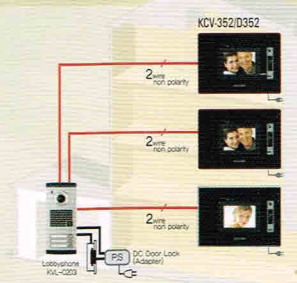


KCV-A374 / KCV-D374 COLOR

- Clear image and high resolution 7" Color Digital LCD
- LCD OSD Menu
- 5 Melody Selection & Ultra Low Power Consumption
- Communication between Main Monitor and Sub Units
- Door Opener Connectable from Either Monitor or Camera
- Connection up to 2 Door Cameras and 2 Monitors with Sub-Audio Unit(KDP-602G)
- KCV-A374 : AC Type, KCV-D374 : DC Type
- Dimension (mm) : AType - 222(W) x 142(H) x 33(D)
DType - 222(W) x 142(H) x 26.5(D)
- Camera connection : KC-C60, KC-MC30, KC-MC24, KC-MC20, KC-MC31

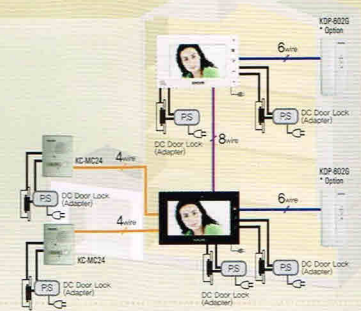

KCV-W354/KCV-DW354 COLOR

- 3.5" Color Digital LCD (NTSC / PAL)
- Compact & stylish Design
- Easy & Simple installation-4 Wire polarity
- LCD OSD Menu
- Room to Door Communication and Monitoring
- 5 Melody Selection
- KCV-W354 : AC Type / KCV-DW354 : DC Type
- Ultra Low Power Consumption
- Communication between Main Monitor and Sub Units
- Door Opener Connectable from Either Monitor or Camera
- Connection up to 2 Door Cameras and 2 Monitors (KCV-W354/DW354 / KCV-301) with Sub-Audio (KDP-602G) *option.
- Dimension (mm) : 195(W) x 140(H) x 34.5(D)

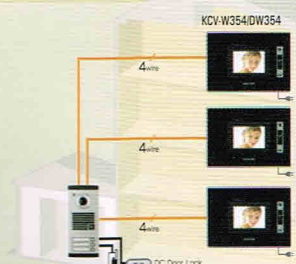

Videophone




KCV-801R D801R/KCV-801/D801 C O L O R

- 7" Color Digital LCD & LED Indication in Conditions
- 4 Melody Selection & OSD Menu Control
- PIR Sensor Camera & CCTV Camera Connection
- CCTV Monitoring Mode & Auto Record in Absence Mode
- Built 128 Cut Images Memory (KCV-801R / KCV-D801R)
- Upto 2 Monitor & 2 Audio Sub Phone with 2 Cameras Connection
- Internal Call & Communication between Extended Indoor Units
- KCV-801R, KCV-801 : AC Type / KCV-D801R, KCV-D801 : DC Type
- Camera Connection : KC-C60, KC-MC35, KC-MC20, KC-MC30, KC-MC31, KC-MC24, KVL-TC302i Series lobby phone
- Dimension (mm) : 295(W)x170(H)x48(D)



KVM-340 B / W

- 4" CRT B/W Videophone
- Internal Call & communication between extended PABX
- Audio & video Conversation with Visitor
- Door open & Monitoring Function
- 5 Melody Selection
- PABX Function
- CCTV Monitoring Mode
- Camera Selection
- Doorlock Connection Camera
- Upto 2 Cameras Connection
- Dimension (mm) : 207(W) x 215(H) x 60.5(D)
- Camera connection : KC-B61, KC-MB30, KC-D20, KC-D33, KC-MB20

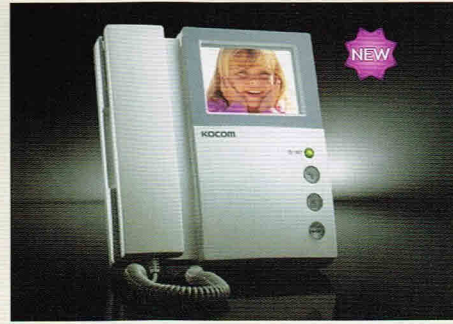


KCV-301 C O L O R

- 4" Color Digital LCD (NTSC/PAL)
- Door open during communication
- Easy & simple installation with only 4 wires
- Intercom function between extended indoor units
- Surface mount type installation
- External 64 cut memory equipment(KVR-300) connection -(B/W)*option
- Connection with up to 2 door cameras, 2 monitors and 2 sub audio phone (KDP-602G)*option
- 5 melody selection
- Dimension (mm) : 210(W) x 222(H) x 57(D)
- Indoor unit connection : KDP-602G (Audio phone), KVM-301, KCV-W354, KCV-801R, KCV-801
- Camera Connection : KC-C60, KC-MC30, KC-MC31, KC-MC24, KC-MC20



KVM-301 B / W

- 4" CRT B/W Videophone
- External 64 Cut Memory Equipment
- Internal Call & communication between extended Indoor Units
- Audio & video Conversation with Visitor
- Door open & Monitoring Function
- 5 Melody Selection & Security Sensor Connection
- PIR Sensor Camera, CCTV Camera Connection
- CCTV Monitoring Mode
- Doorlock Connection Eighter Monitor or Camera
- Upto 2 Monitors & 2 Audio Sub Phones with 2 Cameras Connection
- Dimension (mm) : 210(W) x 222(H) x 57(D)
- Indoor unit connection : KVM-301 : AC Type / KVM-D301 : DC Type
- Camera connection : KC-B61, KC-MB30, KC-D20, KC-D33, KC-MB20, KC-MB31

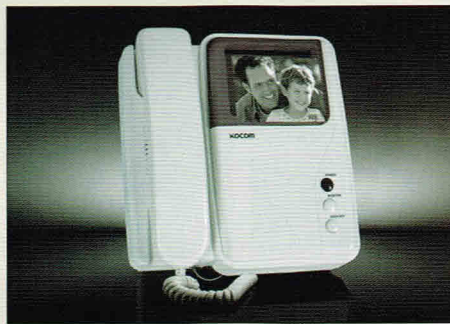

KVM-604 B / W

- 4" CRT B/W Videophone
- Up to 4 Indoor Units (3 monitor & 1 audio handset, KDP-602G) and 1 Front Door Camera Connection
- Audio + Video conversation with Visitor
- Door Open Function
- Dimension (mm) : 204(W) x 210(H) x 53(D)
- Audio handset connection : KDP-602G (No intercom function)
- Camera connection : KC-B61, KC-D20, KC-MB20

Sub Accessory



KDP-602G Interphone


- Extension Sub Doorphone
- Audio Conversation with Door Camera
- Internal Call & Communication
- Door Open
- Indoor unit connection : KVM-301, KCV-301, KCV-W354, KCV-801R, KCV-801
- Dimension (mm) : 92(W) x 210(H) x 57(D)



KVR-300 Interphone

- External Memory Equipment (32M DRAM)
- Upto 64 Cut frame Record
- Play & Record (Manual & Automatic)
- Date Setting (Year / Month / Day)
- Connection with KVM-301 / KVM-D301 Monitor
- Dimension (mm) : 63(W) x 222(H) x 50(D)

Lobby Phone

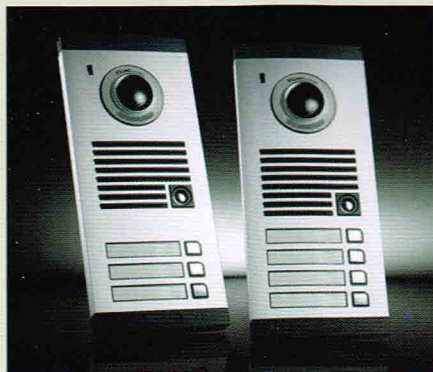

KVL-C302i KVL-C303i/C304i/C306i/C308i **KVL-C202i** KVL-C203i/KVL-C204i


- Modern & Stylish Design
- Easy & Simple Installation with
- 4 Wire-KVL-C302i, KVL-C303i, KVL-C304i, KVL-TC306i, KVL-TC308i, KEL-312, KEL-T324
- 2 Wire-KVL-C202i, KVL-C203i, KVL-C204i, KEL-212
- Call, Communication & Door Open with Monitor
- Door Open by I-Button Key (Dallas Chip) *Option
- Max. 1,300 numbers of I-Button Key registration
- White LED On in Low Illumination

- Name Plate LED On in operation
- Camera Angle Adjustable (Up, Down, Right & Left)
- Receiving & Calling Audio Volume Adjustable
- Long Distance Connection
- Door Lock Connection
- Dimension (mm) : 125(W) x 290(H) x 16(D)
- Box(mm) : 115(W) x 282(H) x 50(D)
- Monitor Connection : 2 Wire - KCV-A372, KCV-D372, KCV-352, KCV-D352
4 Wire - KCV-A374, KCV-301, KCV-W354, KCV-DW351
KCV-801R, KCV-801, KVM-301

4 Wire Lobbyphone



2 Wire Lobbyphone




- KVL-C202i
- KVL-C203i
- KVL-C204i
- KEL-212



KC-MC30/MC32/MB30

- Manual camera angle adjustment
- Protect from pollution & weather proof Material (A/L)
- Night automatic illumination (White LED and IR LED On / Built-in Camera)
- Door lock connectable.
- Dimension(mm):110(W) x 158(H) x 39(D)
- Monitor Connection:
 - KC-MC30(Color) : KCV-A374, KCV-301, KCV-802R, KCV-D802R, KCV-801R, KCV-D801R, KCV-801, KCV-D801
 - KC-MC32 (Color) : KCV-A372, KCV-D372, KCV-352, KCV-D352
 - KC-MB30(B/W) : KVM-301, KVM-D301




KC-MC31/MB31

- Protect from pollution & weather proof Material (A/L)
- Night automatic illumination (White LED On / Built-in Camera)
- Door lock connectable.
- Dimension (mm) : 110 (W) x 158 (H) x 39 (D)
- Monitor Connection :
 - KC-MC31(Color): KCV-A374, KCV-301, KCV-802R, KCV-D802R, KCV-801R, KCV-D801R, KCV-W354, KCV-DW354
 - KC-MB31(B/W) : KVM-301, KVM-D301




KC-C71

- Manual camera angle adjustment
- Night automatic illumination (White LED On / Built-in Camera)
- Dimension(mm) : 89(W) x 131(H) x 13(D)
- Box Size (mm) : 125(W) x 161(H) x 17(D)
- Monitor Connection : KHN-970, KHN-971, KHN-973, KHN-880, KHN-881, KHN-883, KHN-870, KHN-871, KHN-873, KHV-478, KHV-458, KCV-378, KCV-J351, KCV-C374




KC-C60

- Night automatic illumination (White LED and IR LED On / Built-in Camera)
- Door lock connectable
- Dimension(mm) : 95(W) x 127(H) x 34(D)
- Monitor Connection:
 - KCV-J351, KCV-A374, KCV-W354, KCV-DW354, KIV-212, KIV-D212, KCV-A374, KCV-301, KCV-802R, KCV-D802R, KCV-801R, KCV-D801R, KCV-A376, KCV-D376



KC-C62

- Night automatic illumination (White LED and IR LED On / Built-in Camera)
- Door lock connectable
- Dimension(mm) : 95(W) x 127(H) x 34(D)
- Monitor Connection: KCV-A372, KCV-D372, KCV-352, KCV-D352

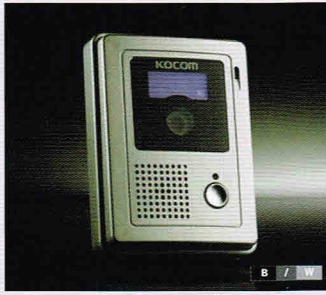

KC-B61/C63

- Night automatic illumination (White LED and IR LED On / Built-in Camera)
- Door lock connectable
- Dimension(mm) : 95(W) x 127(H) x 34(D)
- Monitor Connection:
 - KC-B61: KIV-102, KIV-D102, KVM-520, KVM-D520, KVM-301, KVM-604
 - KC-C63 : KIV-102, KIV-D102



KC-MC35

- Pin-hole lens type Door Camera
- Protect from pollution & weather proof Material (A/L)
- Night automatic illumination (White LED and IR LED On / Built-in Camera)
- Door lock connectable.
- Dimension (mm) : 96(W) x 127(H) x 32(D)
- Monitor Connection : KCV-A374, KCV-301, KCV-W354, KCV-DW354, KCV-D801R, KCV-J351, KIV-212, KIV-D212, KCV-D802R, KCV-802R, KCV-801R, KCV-D801R, KCV-A376, KCV-D376



KC-D33

- Pin-hole lens type Door Camera
- Protect from pollution & weather proof Material (A/L)
- Night automatic illumination (White LED and IR LED On / Built-in Camera)
- Door lock connectable.
- Dimension (mm) : 96(W) x 127(H) x 32(D)
- Monitor Connection : KIV-102, KIV-D102, KVM-301



KC-MC24/MC22

- Call & Communication with resident
- Dimension (mm) : 95(W) x 127(H) x 32(D)
- Monitor Connection :
 - KC-MC22 : KCV-A372, KCV-D372, KCV-352, KCV-D352
 - KC-MC24 : KCV-A374, KCV-301, KCV-802R, KCV-D802R, KCV-801R, KCV-D801R, KCV-W354, KCV-DW354



KC-D20

- Pin-hole lens type Door Camera
- Protect from pollution & weather proof Material (A/L)
- Night automatic illumination (LED On / Built-in Camera)
- Door lock connectable.
- Dimension (mm) : 95(W) x 127(H) x 34(D)
- Monitor Connection : KVM-520, KVM-D520, KVM-301, KVM-604



KC-MC11/MC20

- Call & Communication with resident
- Dimension (mm) : 40(W) x 120(H) x 22(W)
- Monitor Connection:
 - KC-MC11 : KCV-A372, KCV-D372, KCV-352, KCV-D352
 - KC-MC20 : KCV-A374, KCV-301, KCV-W354, KCV-DW354, KIV-212, KIV-D212, KCV-A376, KCV-D376



KC-MB20


- Call & Communication with resident
- Dimension (mm) : 40(W) x 120(H) x 22(W)
- Monitor Connection: KIV-102, KIV-D102, KVM-604, KVM-301, KVM-D301

Doorlock Series




KDL-T1

- Door open by I-Button key & Access code
- Panic function (One touch door open)
- Automatic re-locking function
- Double-lock function
- Auto-lock function
- Prank & theft prevention function
- Intrusion Alert
- Battery change alert function
- Body Dimension :
Out - 75(W) x 310(H) x 34(D) mm
In - 56(W) x 278(H) x 40(D) mm

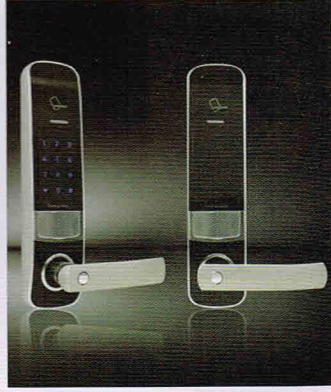

KDL-C3

- Voice guide function
- Touch Key button
- Door open by RFID & Access code
- Panic function (One touch door open)
- Automatic re-locking function
- Double-lock function
- Auto-lock function
- Prank & theft prevention function
- Intrusion Alert
- Battery change alert function
- Alarm function for locking or unlocking fails (6 access code from 4 to 12 digit)
- Body Dimension :
Out - 77(W) x 280(H) x 32(D) mm
In - 77(W) x 280(H) x 32(D) mm

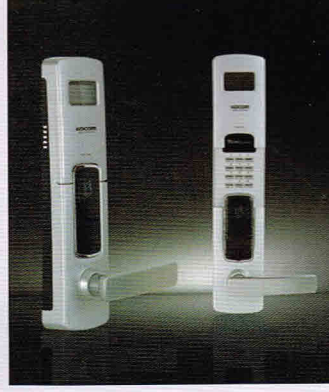

KDL-F1

- Door open by Finger print & Access code
- Panic function (One touch door open)
- Automatic re-locking function
- Double-lock function
- Auto-lock function
- Prank & theft prevention function
- Intrusion Alert
- Battery change alert function
- Alarm function for locking or unlocking fails
- LCD Display
- mmhakBody Dimension :
Out - 80(W) x 305(H) x 45(D) mm
In - 80(W) x 278(H) x 40(D) mm



KDL-F2

- Voice guide function
- Door open by Finger print & RFID & Access code
- Panic function (One touch door open)
- Automatic re-locking function
- Double-lock function
- Auto-lock function
- Prank & theft prevention function
- Intrusion Alert
- Battery change alert function
- Alarm function for locking or unlocking fails
- Body Dimension :
Out - 72(W) x 280(H) x 32(D) mm
In - 70(W) x 280(H) x 40(D) mm

Sub Device

Bathroom Phone & Sub Videophone



KBP-105

Bathroom Phone

- Emergency Call
- Flush mount Type
- Water proof cover
- Telephone Function
- Communication System : Handsfree type
- Dimension(mm) : 120(W) x 120(H) x 12(D)
- Back Dimension(mm) : 70.5(W) x 70(H) x 25(D)



KSP-230

Sub Videophone

- 4" LCD Display Handsfree Type
- Call & Communication with visitor
- Call & Communication with resident
- Door open function
- Common gate (Lobby phone) / Door Open
- Guard Master Call
- Emergency Call
- Dimension (mm) : 224(W) x 146(H) x 18(D)
- Back Dimension : 157(W) x 162(H) x 100(D)

TV Videophone




KTD-520/ KTD-511

TV Videophone

- 10.2"(KTD-520) / 7"(KTD-511) Color LCD
- Auto Scanning for TV & Radio
- EPG (Broadcast information) / OSD Menu / Auto Adjustment / Stereophonic Sound / External Input(Optional)
- Telephone Function / Handsfree phone
- Communication front Door / Common Gate (Lobby Phone) Door Open / Guard master Communication / Visitor Check
- Water proof cover (IP: 65)
- Dimension (mm) :
KTD-520 - Body : 305(W) x 259(H) x 34(D)
Box : 260(W) x 200(H) x 80(D)
KTD-511 - Body : 235(W) x 220(H) x 34(D)
Box : 190(W) x 176(H) x 80(D)

Bathroom TV Videophone

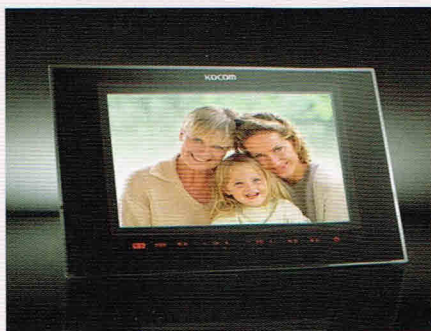

KSP-270


- 7" Color LCD
- Telephone Function
- Room to room communication and Monitoring
- Water proof cover(IP65), Touch Switch Type
- Emergency Call
- TV Function – Standard Broadcast
- Angle Adjustment (Monitor Left 90° / Right 90°)
- Front Door Call / Door open
- Guard Office Room Call / Door open
- Dimension : 268(W) × 168(H) × 103(D)mm
27mm Surface
- Box (mm) : 240(W) × 191(H) × 92(D)mm

Bathroom TV Videophone



7 inch

Kitchen TV Videophone

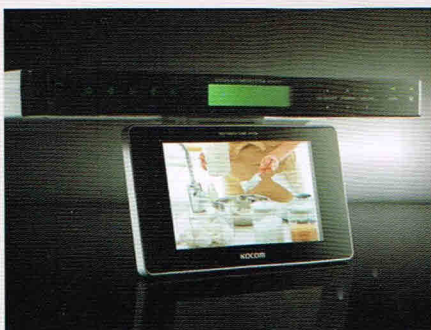

KTD-70B/70T

Kitchen TV Videophone

- 7" Wide Color Touch LCD Screen
- FM Radio / TV Function
- Analog and Digital TV
- Communication between Front door and Monitoring / Common gate (Lobby phone)/ Door Open
- Auto Selecting / Memory Frequency
- Handsfree Communication
- Dimension (mm) : Body-350(W) × 37(H) × 235(D)
Monitor-210(W) × 120(H) × 30(D)



KTD-512MR /510MR Kitchen TV Videophone

- KTD - 512MR : 10.2" Color LCD
- KTD - 510MR : 7" Color LCD
- TV Function (Digital & Cable Receive) / FM Radio
- EPG (Broadcast information) / OSD Menu / Auto Adjustment / Stereophonic Sound / External Input (Option)
- Telephone Function / Handsfree phone
- Front Door / Common gate Door Open Function
- Guard Master / Visitor image Function
- Dimension(mm) : Body - 320(W) × 35(H) × 225(D)
KTD-512MR : Monitor - 283(W) × 167(H) × 28(D)
KTD-510MR : Monitor - 207(W) × 120(H) × 28(D)

KTD-512TB /510TB Kitchen TV Videophone

- KTD - 512TB : 10.2" Color LCD
- KTD - 510TB : 7" Color LCD
- TV Function (Digital & Cable Receive) / FM Radio
- EPG (Broadcast information) / OSD Menu / Auto Adjustment / Stereophonic Sound / External Input (Option)
- Telephone Function / Handsfree phone
- Front Door / Common gate Door Open Function
- Guard Master / Visitor image Function
- Dimension(mm) : Body : 320(W) × 35(H) × 225(D)
KTD-512TB : Monitor- 283(W) × 167(H) × 28(D)
KTD-510TB : Monitor- 207(W) × 120(H) × 28(D)

Control Device & Security Sensor

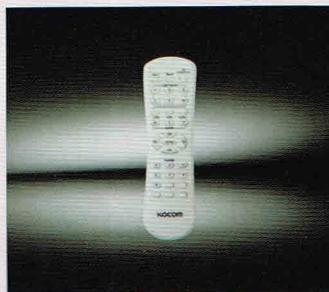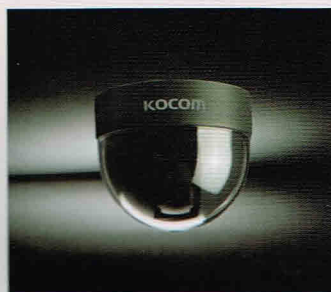

KP-IR100

IrDA Generator

- Dome Housing Type Surface Mount
- IR Emission : Omni-Direction
- IR Code Form : Toshiba 37.9KHz
- Universal Remote Control Code for total Home Appliance built-in (TV, DVD, Air conditioner and etc)
- IR Code Learning Function Supply (5 device, 5 Commander per Device)
- Communication : IR (Infrared ray), RS-485
- Power : DC 5V-12V
- Main Controlled Device

RH29

Remote Controller

- Communication : IrDA Function
- Home Appliance Control : Air Conditioner, TV, Audio / Video Channel & Volume Control
- Lighting Switch Control : (Each / All) Power ON/OFF
- Motor Curtain Control : Open, Close, Stop, Total Control
- Gas Valve Control : Gas Valve Close, Motor Curtain, Gas Valve etc


Gas leakage & Gas Valve

- Power : DC 12V (Powered from Wall-Pad)
- Power consumption : 1.3W
- Installation Place : LNG - Top 30cm / LPG - Floor 30cm
- Gas Alarm : LNG - 0.06 ~ 1.25% / LPG - 0.06 ~ 0.45%
- Information Display : Yellow Lamp Blink, Emergency Sound
- Warning Output : DC10V
- Warning Volume : 70dB
- Dimension (mm) : 70(W) × 96(H) × 35(D)

Motion Sensor

- Block Method : Auto Gear system
- Torque (Max) : 65kgf.cm
- Block Speed : less than 8sec
- Pressure : Low Pressure (0.1Kg / cm²)
- Durability : more than 6,000
- Drive Control Method : Motor Limited SW
- Switchgear : Manual & Remote system
- Standard : 20A
- Weight : 180
- Installation Place : Kitchen

Security Sensor

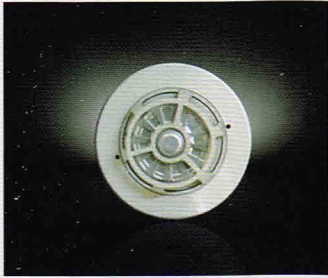

Fire Sensor


- Installation Place : Kitchen



Burglar Sensor


- Installation Place : Front Door, Window
- Dimension (mm) : 50(W) x 13.5(H) x 15(D)

Curtain Motor

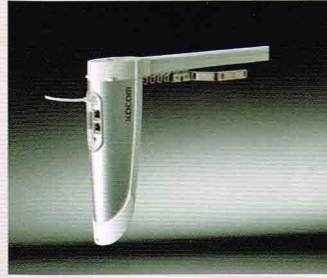

KAR-4000

- Input : AC 100-250V / 50-60Hz
- Output : DC 24V (Built-In Adaptor)
- Electric Consumption : 38W during operating
- Communication System : Wireless : 1way 2way RF, H/N : RS-485
- Speed control Range : 10 Levels
- Open/Close Speed : 25 cm/sec
- Max. Rail Length : 12Meter / Single, 20Meter/ Tandem
- Max. Curtain Weight : 60kg / Single, 90kg/ Tandem

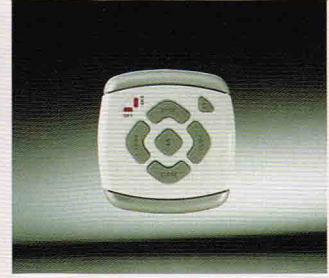


KSR-4200

- No Need Wiring : You can Easily attach it to the Desired Location without the need of Connecting Cables
- RF Communication : You can Control in any place Regardless of Obstacles
- 2 Channels : You can Control 2 Motors Separately & Collectively.
- Wide Usage : You can use Wall Switch in Parallel with Remote Controller

Curtain Switch




KSR-4301 KSR-4300

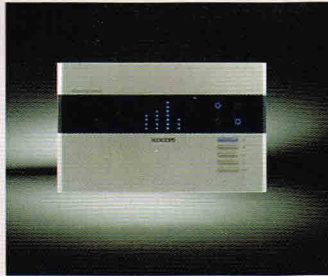

KV-0404

- Realization of both Dimming and Turn-on / off Functions
- Graceful Interior mood through various lighting and Scene Formations
- Mode Control (common duty / Home theater / Movie Watching / Energy saving / Sleep Mode, etc.)
- Remote controlling through a remote controller & Home Net (Optional)
- Power : AC 90V-240V, 50/60Hz
- Control circuit : Dimming & On/Off 4 circuit
- Dimension : Flush box (built-in), Box size(mm) : 221(W) x 129.2(H) x 62(D) Body(mm) : 195(W) x 120(H) x 8.5(D)

Lighting Switch

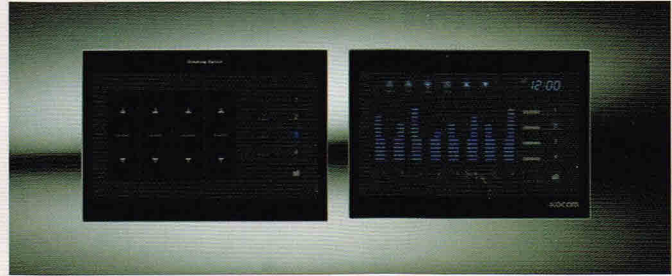

KL-0400 / 0602 / 0800

- Realization of both Dimming and turn-on/off Functions
- Graceful Interior mood through Various Lighting and Scene Formations
- Mode Control (Common duty / Energy Saving / Sleep Mode, etc.)
- Remote Controlling through a Remote Controller & Home Net (Optional)
- All Dimming & Turn-on/off Control, On/off on Demand on Time.
- Circuit - KL-0400 : Dimming & On / Off 4 Circuit
KL-0602 : Dimming 6 Circuit & On / Off 2 Circuit
KL-0800 : Dimming & On / Off 8 Circuit
- Power : AC 110V-240V, 50/60Hz
- Load Capacity : KL-0400 : 300W per Circuit, KL-0800 : 1KAV per Circuit
- Dimmable Lighting : IL, Halogen (Dimmable), FL (with Dimmable Ballast)
- Dimension (mm) : Flush Box (built-in), Box Size : 172(W) x 102(H) x 75(D) Body(mm) : 172(W) x 102(H) x 8(D)

KSR-4301/4300

- Tilting function : You can control blinds tilting only by pushing button
- Buzzer Sound / Mute : You can check the opened and closed status of up to 8 curtains in real time through the LCD screen.
- Percentage Unit Control : You can control curtain or blind by percentage unit.
- RF Communication : You can control in any place regardless of obstacles
- 1 or 4 Channels : You can control 4 motors separately and collectively



KV-3011



KV-3012



KV-5014



KV-5021

KV-3011/KV-3012/KV-5014/KV-5021

- Power : AC 220V
- Communication Type : RS-485
- Installation Place : Wall
- Dimension (mm) : Lighting Switch 1 / Switch2 - 78(W) x 120(H) x 46(D)
Lighting Switch 4 / Switch 5 / Switch 6 / Switch 7 - 124(W) x 120(H) x 41(D)

Emergency Switch




Emergency Switch

- Power : Relay system
- Flush Box : Switch 1 BOX
- Installation Place : Wall
- Option: Contacting to Wall Pad and Guard Master
- Dimension (mm) : 78(W) x 120(H) x 46(D)

All K2B items can be compatible with each other

(No needs extra power connection)


Villa, Condominium and Single house

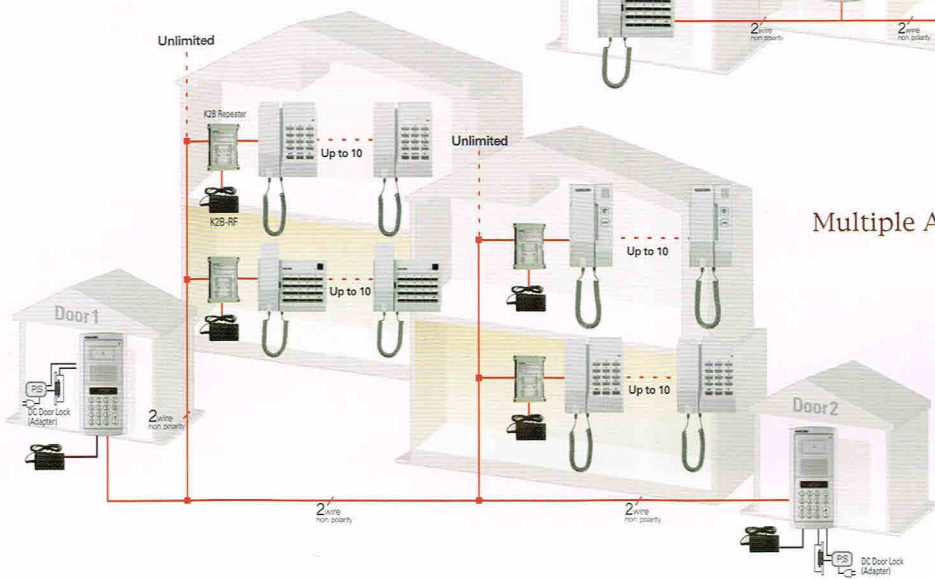

K2B-PM20J-WK



- Intercom function
- Door open function & Lobby Door Open function
- Calling between household
- Group setting and Paging function
- Guard master function
- Dimension (mm) : 175(W) x 173(H) x 38(D)



K2B-PT12J-WN



- Intercom function
- Common gate Communication & Door open
- Calling between household
- Outdoor pannel Communication (DS-2D)
- Call & Communication with resident
- Dimension (mm) : 140(W) x 175(H) x 39(D)



K2B-PS02J-WN



- Intercom function
- Door open function
- Common gate Communication & Door open
- Dimension (mm) : 92(W) x 176(H) x 57(D)



K2B-LV12J-SN



- Door open function
- Door open function by access code
- Call & Communication with resident
- Keypad backlight function
- Dimension (mm) : 122(W) x 255(H) x 23.5(D)
- Box (mm) : 101(W) x 223(H) x 105(D)

Multiple Doorphone



KDP-100 KDP-104/KDP-108/KDP-112

- Upto 4 Houses (KDP-104), upto 8 Houses (KDP-108), upto 12 Houses (KDP-112)
- Upto 450 Houses Connection (KDP-100)
- Communication with Guard Master (KDP-100)
- Door Open Function by Access Code (KDP-100)
- Firm Metal Body Case with New Modern design
- Upto 4pcs of Common Gate Panels Connection in a Building
- Dimension (mm) : 122(W) x 255(H) x 23.5(D)
- Box (mm) : 101(W) x 223(H) x 105(D)



KIP-603 Multiple Interphone

- For Multi Apartment, Condominium & villa System, upto 450 Houses are Available
- Up to 3 Indoor Extension in a House
- Internal Call & Conversation Function between Extended Indoor units in a House
- Audio Conversation with Visitor
- Door Open (Common gate) Function
- Call & Conversation Function with Guard Master (KIP-120)
- Dimension (mm) : 92(W) x 210(H) x 57(D)




KIP-120 Guard Masterphone

- Call & Communication Function with Resident & Extended KIP-120 (Up to 10pcs in a system)
- Call cancel function (cancel button)
- Each Tenant LINE Check Function
- Communication with 10key type Common Gate Panel (KDP-100) (When it is Called from KLP-C100, KLP-100, KLP-P100 or KDP-100)
- Door Open
- Dimension (mm) 165(W) x 220(H) x 80(D)



KDP-603 Multiple Doorphone

- Communication with door panel (DS-2D) & common gate panel (KDP-100, KDP-104, KDP-108 or KDP-112)
- Guard Master Phone (KIP-120) call & communication
- House no. setting --> DIP SW setting
- KDP-603 : powered from common power (additional adaptor is necessary per 10pcs for audio door phone system)
- Door release function during communication with common gate panel or door panel
- Common 5 wire type (Power, GND, Voice1, Voice2, Data) wiring
- Dimension (mm) : 92(W) x 210(H) x 57(D)



KLP-1000 Common Gatephone

- Door Open Function by Access Code
- Firm Metal body Case with New Modern Design
- Upto 2pcs of Common Gate Panel Connection in a Building
- max. connection : 585 house units
- Dimension (mm) : 210(W) x 182(H) x 25(D)
- Doorphone Connection : KDP-205



KDP-205 Multiple Doorphone

- For multi Apartment, Condominium & Villa System, upto 585 Houses are Available
- Audio Communication with visitor
- Door Open (Common gate) Function
- Call & Communication function with Common Gate pannel (KLP-1000)
- Dimension (mm) : 95(W) x 214(H) x 64(D)



DP-203HA Doorphone

- Upto 3 Houses Connection
- Audio Communication with Visitor
- Door Open Function
- Gentle Electronic Sound
- Easy Installation (mount on the Wall or Desk)
- Dimension (mm) : 95(W) x 214(H) x 64(D)



KDP-601A Doorphone

- Upto 3 Houses Connection
- Audio Communication with Visitor
- Door Open Function
- Gentle Electronic Sound
- Easy Installation (mount on the Wall or Desk)
- Dimension (mm) : 92(W) x 210(H) x 57(D)

Duplex Interphone & Triplex Interphone



KIP-222 Duplex Interphone

- Duplex Interphone & Doorphone
- Audio Communication with Visitor
- Door Open Function
- Internal Call & Communication with Extended Units
- Gentle Electronic Sound (Separate Call Sound)
- Easy Installation (Mount on the Wall or Desk)
- Dimension (mm) : 95(W) x 214(H) x 57(D)



KDP-602A/D Triplex Doorphone

- Duplex Interphone & Doorphone
- Upto 2 Audio Handset with 1 Outdoor Panel Connection
- Audio Communication with visitor
- Door open function
- Internal Call & Communication with Extended Units
- Gentle Electronic Sound (Separate Call Sound)
- Easy Installation (Mount on the Wall or Desk)
- Dimension (mm) : 92(W) x 210(H) x 57(D)

■ Duplex Interphone



IP-201P Duplex Interphone

- Duplex Interphone
- Gentle Electronic Sound
- Easy Wiring & Installation (Mount on the Wall or Desk)
- Dimension (mm) : 95(W) x 214(H) x 64(D)



KIP-501P Duplex Interphone

- Duplex Interphone
- Gentle Electronic Sound
- Easy Wiring & Installation (Mount on the Wall or Desk)
- Dimension (mm) : 95(W) x 214(H) x 64(D)



KIP-601P Duplex Interphone

- Duplex Interphone
- Gentle Electronic Sound
- Easy Wiring & Installation (Mount on the Wall or Desk)
- Dimension (mm) : 92(W) x 210(H) x 57(D)



DP-906H Doorphone

- Audio Communication with Visitor
- Door Open Function
- Gentle Electronic Sound
- 4 Melody Selection
- Easy Installation (Mount on the Wall or Desk)
- Dimension (mm) : 92(W) x 210(H) x 57(D)

■ Multiple Interphone & Wireless Interphone



KIP-620ML Multiple Interphone

- 20Ch Multiple Interphone
- Master(KIP-620ML) & Sub(KIP-300) Phone system
- LED Indicator for All line
- Paging function to selected house.
- Easy Wiring & Installation (Terminal Box, Mount on the Wall or Desk)
- Mount type : Surface mount & desktop
- Dimensions : 175(W) X 175(H) X 55(D)mm



KIP-300 Sub Interphone

- Sub unit for KIP-620ML
- Gentle Electronic sound
- Easy Installation (2 Wire non-polarity)
- Dimension (mm) : 75(W) x 176(H) x 50(D)



KIP-605PG Multiple Interphone

- 5 Ch Multiple Interphone
- Single or Multiple Connection
- All Master Intercom System
- Paging Function
- Gentle Electronic Sound
- Easy Wiring & Installation (Mount on the Wall or Desk)
- Outdoor panel, DS-4M Connection (Option)
- Dimension (mm) : 92(W) x 210(H) x 57(D)



KIP-611PG Multiple Interphone

- 11 Ch Multiple Interphone and Doorphone
- Single or Multiple Connection
- All Master Intercom System
- Paging Function
- Gentle Electronic Sound
- Easy Wiring & Installation (Mount on the Wall or Desk)
- Outdoor panel, DS-4M Connection (Option)
- Dimension (mm) : 92(W) x 210(H) x 57(D)



KIP-612ML/ IP-200PC

- 12Ch Multiple Interphone
- Master (KIP-612ML) & Sub (IP-200PC) Phone System
- Gentle Electronic Sound
- Easy Wiring & Installation (Mount on the Wall or Desk)
- Sub Interphone for KIP-612ML
- Dimension (mm) :
-KIP-612ML : 92(W) x 210(H) x 57(D)
-IP-200PC : 95(W) x 214(H) x 64(D)



KWI-2000L Wireless Interphone

- Communication between operated locations on the same power transformer
- Avoid locations where there is a sub-transformer between them.
- Dimension (mm) : 98(W)x203(H)x70(D)

Audio Lobbyphone & Interphone



KAL Series

Audio Lobbyphone


- Slim & Stylish Surface mount type Audio Entrance Panel
- Call, Communication, and Door Open with Interphone (KIP-304)
- Clear & Loud Voice & convenient Voice Volume Control
- Max. 40 Household connections available
- Name Plate backlight (LED lamp)
- Safe Door Open function only when the communication is made
- Two door release type (NO & NC) connection available
- Security Alarm Function (Security Sensor (not included) is needed)
- Dimension(mm) : 125(W) X 240(H) X 30(D)



KIP-304

Interphone

- Slim & Stylish Surface mount type Audio Interphone
- Audio Communication with a Visitor
- Clear & Loud Voice
- Door Open (Common Gate) Function
- Easy Installation (3+n)
- For Multi Apartment, Condominium, Villa, Office, Bank and Hospital
- Dimension(mm) : 75(W)X176(H)X52(D)

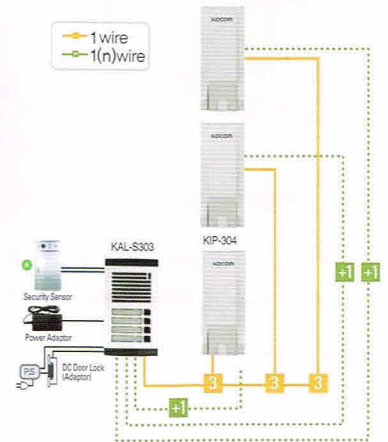


Intercom



KIC-308(8CH) 301(1CH)/304(4CH)

- Perfect Communication
- Delightful Signal Sound
- LED Indicator for All line
- Easily 2 Wiring of polarity
- Power Supply One Side One used D.C 6V
- Easily Mounted On wall, Desk
- Taking with Call, Power Indicator and Signal Volume
- Dimension (mm) : 272(W) x 125(H) x 42(D)



KIC-300S (Sub)

Intercom

- Sub Intercom for KIC-301, KIC-304 and KIC-308
- Dimension (mm) : 272(W) x 125(H) x 42(D)

Outdoor Panel




DS-4M/DS-2D

- Singel house outdoor Panel
- Calling Household
- Dimension (mm) : 99(W) x 131(H) x 30(D)
- Audio handset Connection :
-DS-2D : DP-203HA, DP-203HD, DP-203HD
KDP-501A, KDP-501D, KDP-601A
KDP-601D, DP-906H, KIP-222
KDP-602A/D
-DS-4M : KIP-605PG, KIP-611PG.



MS-2D

- Singel house outdoor Panel
- Calling Household
- Metal Outdoor
- Dimension (mm) : 95(W) x 127(H) x 32(D)
- Audio handset Connection :
DP-203HA, DP-203HD, DP-203HD,
KDP-501A, KDP-501D, KDP-601A,
KDP-601D, DP-906H, KIP-222,
KDP-602A/D

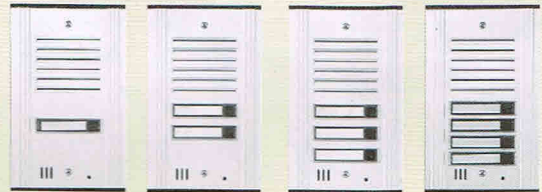

MSD-1B/MSD-2B/MSD-3B/MSD-4B

- Aluminum Common Gate Panel
- 1 House (MSD-1B) / Upto 2 House (MSD-2B)
Upto 3 House (MSD-3B) / Upto 4 House (MSD-4B)
- Rain Proof, Metal Anti Vandal
- Dimension (mm) : 122(W) x 199(H) x 35(D)
- Audio handset Connection :
DP-203HA, DP-203HD, KDP-601A / KDP-601D
DP-906H, KIP-222, KDP-602A/D

Outdoor Panel